

YOUR ONE-STOP SERVICE CENTER FOR ALL SCAFFOLDING NEEDS!



**YOUR
SAFETY PROTECTION
EXPERT**

TFF INTERNATIONAL CO.,LIMITED
天津迪凡国际有限公司

Mob: 0086 17612260469
Email: natasha@tff-glove.com


ADD:710 Room CaiZhi Building No.9 ErWei Road DongLi Develop Area
TianJin China

TFF INTERNATIONAL CO.,LIMITED
天津迪凡国际有限公司

PRODUCTION LINE




PRODUCTION LINE

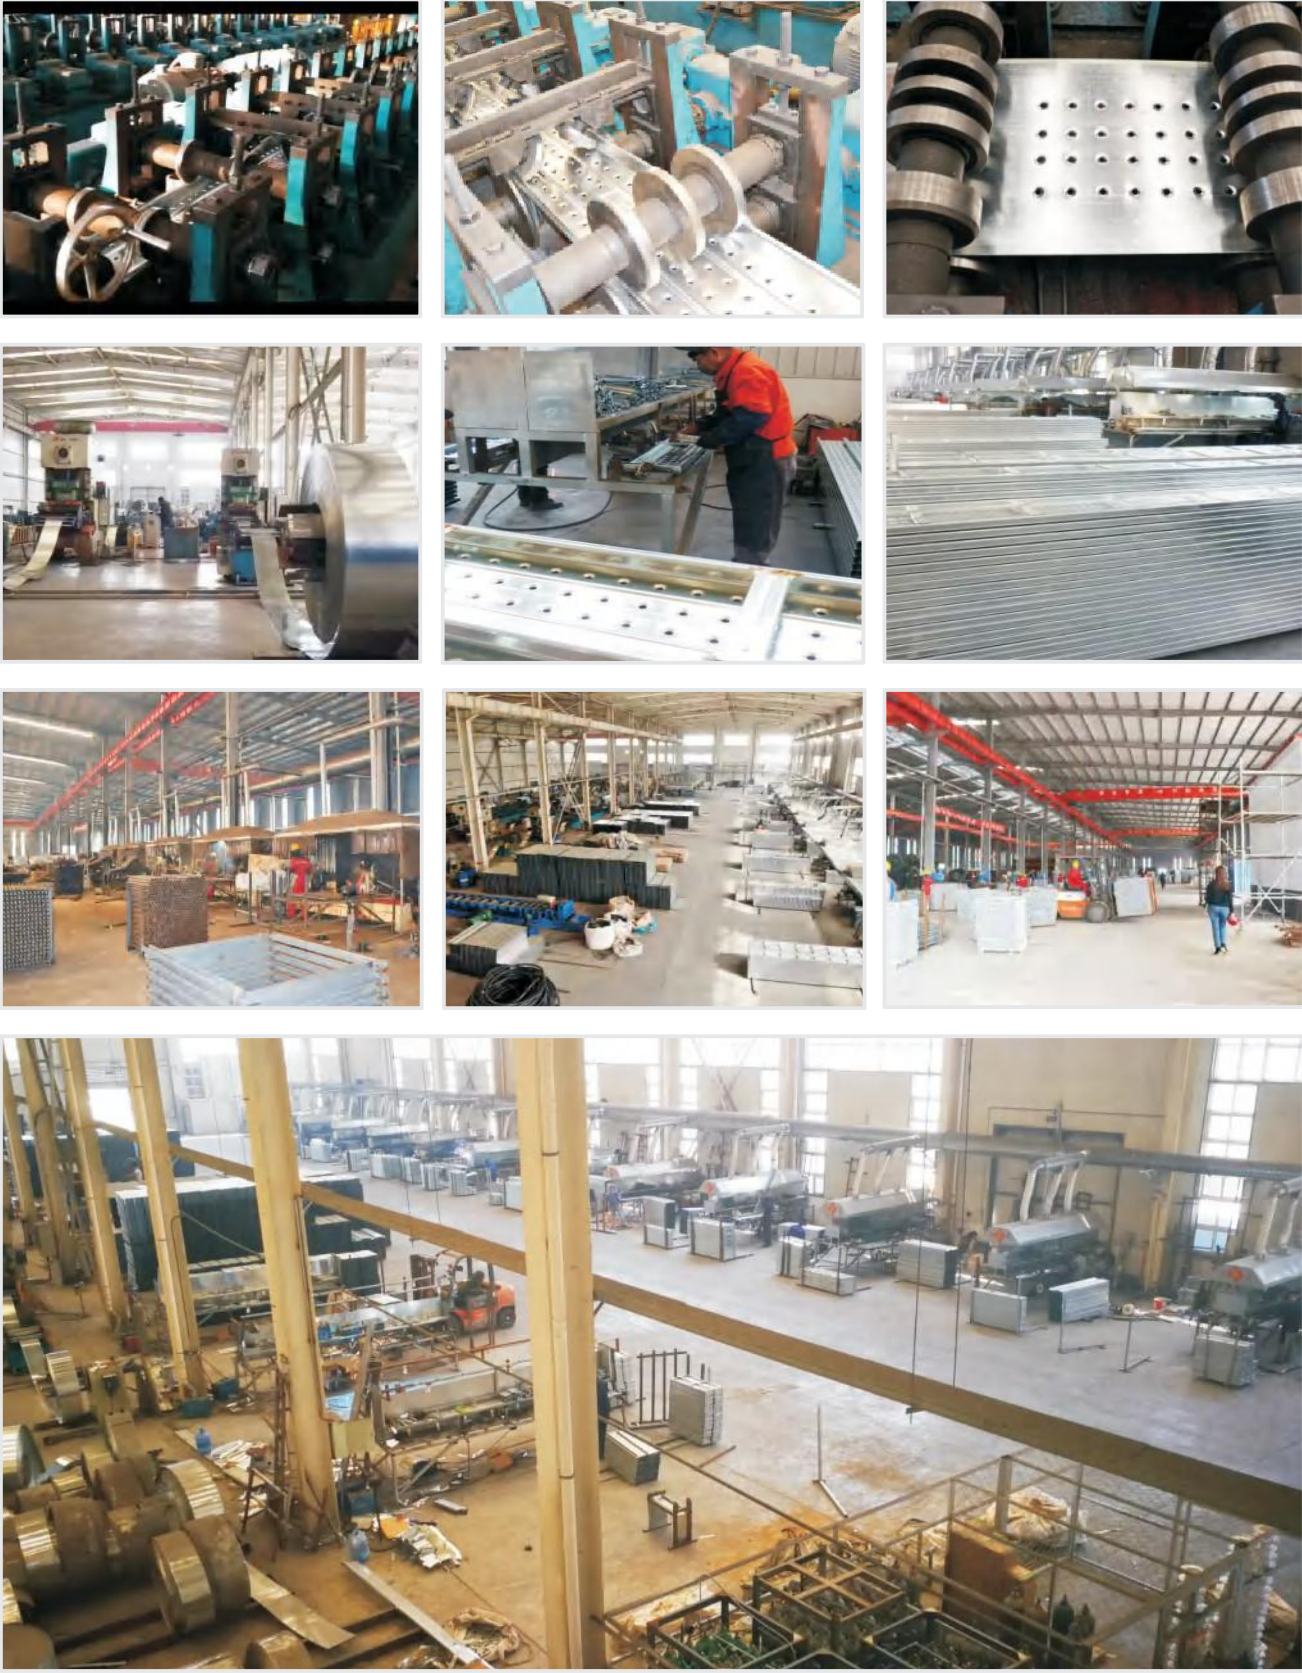

RINGLOCK SCAFFOLDING

- Material: Q235/Q345
- Surface Treatment: HDG;Painted

Item Name	OD&Thickness (mm)	Length (mm)
Ringlock Standard	48.3*3.2	250-3000
Ringlock Ledger	48.3*3.2	500-3000
Diagonal Brace	48.3*3.2	/
Ringlock Standard	60.3*3.2	250-3000
Ringlock Ledger	48.3*2.5	500-3000
Diagonal Brace	42.3*2.5	/

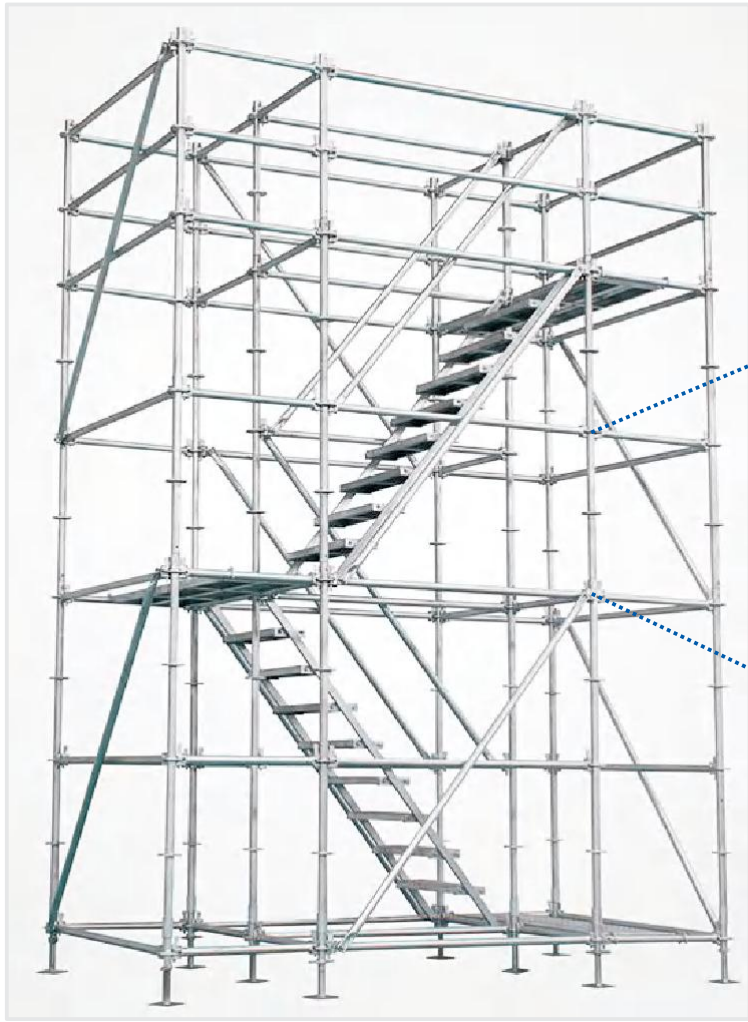

RINGLOCK SCAFFOLDING



Standard



Ledger



Diagonal Brace



Rosette



Wedge Pin



Ledger Head



Brace Head



Base Collar



Bracket



METAL PLANK

- Southeast Asia; Middle East; Australia; America Metal Plank
- Material: Q195 Surface Treatment: Pre Galvanized


Width (mm)	Support	Thickness (mm)	Height (mm)	Length (mm)
210	Common/Box /Ladder	1.0-2.0	45	1000-4000
240	Common/Box /Ladder	1.0-2.0	45	1000-4000
250	Common/Box /Ladder	1.0-2.0	40/50	1000-4000
225	Common/Box /Ladder	1.0-2.0	38	1000-4000
230	Common/Box /Ladder	1.0-2.0	63.5	1000-4000



CATWALK

• CATWALK

Width (mm)	Height (mm)	Thickness (mm)	Length (mm)	Hook (mm)
210/240/250	45/50	1.0-2.0	1000-3000	Ø44/50
420/450/480/500	45/50	1.0-2.0	1000-2500	Ø44/50

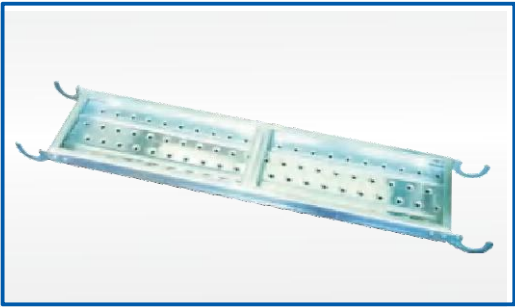

• TOEBOARD

Width (mm)	Height (mm)	Thickness (mm)	Length (mm)	Hook (mm)
150	19	1.0-1.5	1000-3000	/
210/240	45	1.0-1.5	1000-3000	/



SCAFFOLDING COUPLERS & ACCESSORIES

				
Girder Coupler 48.3mm/1.50kg	Board Retaining Clamp 48.3mm/0.63kg	Drop Forged Half Coupler 48.3mm/0.9kg	British Drop Forged Double Coupler 48.3mm/1.05kg	British Drop Forged Swivel Coupler 48.3mm/1.25kg
				
Drop Forged Putlog Coupler 48.3mm/0.65kg	Drop Forged Joint Pin 48.3mm/1.1kg	Pressed Putlog Coupler 48.3mm/0.63kg	British Pressed Double Coupler 48.3mm/0.82kg	British Pressed Swivel Coupler 48.3mm/1.00kg
				
Pressed Double Coupler 48.6mm/0.68kg	Pressed Swivel Coupler 48.6mm/0.68kg	Pressed Sleeve Coupler 48.3mm/1.00kg	British Inner Joint Pin 48.3mm/0.84kg	Limpet Coupler 48.3mm/0.38kg
				
Ladder Clamp 48.3mm/0.62kg	U Clip 0.16kg	U Clip 0.48kg	Rapid Clamp 0.51kg	Rapid Clamp Tensioner 1.33kg
				
Rapid Clamp 0.42kg	Rapid Clamp Tensioner 2.70kg	Safety Net 1.83M*5.1M*0.95kg	Safe Tag	Casters
				
Steel Cone 0.62kg	Water Stopper 0.48kg	Plate Washer 0.57kg	Wing Nut 0.53kg	Tie Rod M12/17

SCREW JACKS

- Type: Solid, Hollow
- Material: Solid—Q235 Round Bar, Hollow—Q235 Seamless Pipe, Welded Pipe
- Surface Treatment : Painted, Electro - Galvanized, HDG

Name	Jack Size (mm) OD&Length	Base Plate (mm)
Solid Base Jack	28/30/32/34/38 * (400-1000)	120*120*(3.5-8)
		140*140*(3.5-8)
		150*150*(3.5-8)
Solid U-Head Jack	28/30/32/34/38 * (400-1000)	150*120*50*(3.5-8)
		150*150*50*(3.5-8)
		180*150*50*(3.5-8)
		130*170*50*(3.5-8)
Hollow Base Jack	34/36/38/48(400-1000)	120*120*(3.5-8)
		140*140*(3.5-8)
		150*150*(3.5-8)
Hollow U Head Jack	34/36/38/48(400-1000)	150*120*50*(3.5-8)
		150*150*50*(3.5-8)
		180*150*50*(3.5-8)
		130*170*50*(3.5-8)
Base Plate	38*4*150 36*1.5*100 42*2.2*100	120*120*(3.5-8)
		140*140*(3.5-8)
		150*150*(3.5-8)



SCAFFOLDING PROP


- Material: Q195/Q235
- Surface Treatment: Painted, Electro-Galvanized, HDG
- Heavy Duty Prop (with Normal Nut)

Min	Max	Inner Tube	Outer Tube
1.8m	3.2m	48*2.0mm	60*2.0mm
2.0m	3.6m	48*2.0mm	60*2.0mm
2.2m	3.9m	48*2.0mm	60*2.0mm
2.5m	4.5m	48*2.0mm	60*2.0mm
3.0m	5.5m	48*2.0mm	60*2.0mm



- Light Duty Prop (with Cup Nut)

Min	Max	Inner Tube	Outer Tube
1.7m	3.0m	40*2.0mm	48*2.0mm
		48*2.0mm	56*2.0mm
1.8m	3.2m	40*2.0mm	48*2.0mm
		48*2.0mm	56*2.0mm
2.0m	3.5m	40*2.0mm	48*2.0mm
		48*2.0mm	56*2.0mm

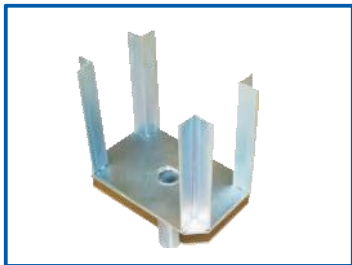

LADDER BEAM

- Material: Q235/Q345
- Surface Treatment: Painted , HDG

OUTER PIPE (MM)	INNER PIPE (MM)	WIDTH (MM)	LENGTH (MM)
48.3*3.0	48.3*3.0	300	1000-6000
48.3*3.2	48.3*3.2	300	1000-6000
48.3*3.6	48.3*3.6	300	1000-6000
48.3*4.0	48.3*4.0	300	2000-6000



Flat Forms

Length (mm)	Width (mm)	Height (mm)	Thickness (mm)	Surface Treatment
1800	300	55	3/4	Painted
1500	300	55	3/4	Painted
1200	300	55	3/4	Painted
900	300	55	3/4	Painted
750	300	55	3/4	Painted
600	300	55	3/4	Painted
1800	200	55	3/4	Painted
1500	200	55	3/4	Painted
1200	200	55	3/4	Painted
1800	125	55	3/4	Painted
1500	125	55	3/4	Painted
1200	125	55	3/4	Painted
1800	100	55	3/4	Painted
1500	100	55	3/4	Painted
1200	100	55	3/4	Painted



Corner Angles

Length (mm)	Flange (mm)	Height (mm)	Thickness (mm)	Surface Treatment
1500	50×50	55	3/4	Painted
1200	50×50	55	3/4	Painted
900	50×50	55	3/4	Painted
750	50×50	55	3/4	Painted
600	50×50	55	3/4	Painted



Internal Corner Forms

Length (mm)	Flange (mm)	Height (mm)	Thickness (mm)	Surface Treatment
1800	100×150	55	3/4	Painted
1500	100×150	55	3/4	Painted
1200	100×150	55	3/4	Painted
900	100×150	55	3/4	Painted
750	100×150	55	3/4	Painted
600	100×150	55	3/4	Painted
1800	150×150	55	3/4	Painted
1500	150×150	55	3/4	Painted
1200	150×150	55	3/4	Painted



Square Corner Forms(S-Forms)

Length (mm)	Flange (mm)	Height (mm)	Thickness (mm)	Surface Treatment
300	150×150	55	3/4	Painted
350	150×150	55	3/4	Painted
400	150×150	55	3/4	Painted
450	150×150	55	3/4	Painted
500	150×150	55	3/4	Painted



L-Shape Forms(L-Forms)

Length (mm)	Flange (mm)	Height (mm)	Thickness (mm)	Surface Treatment
300	200×150	55	3/4	Painted
350	200×150	55	3/4	Painted
400	200×150	55	3/4	Painted
450	200×150	55	3/4	Painted
500	200×150	55	3/4	Painted



External Corner Forms


Length (mm)	Flange (mm)	Height (mm)	Thickness (mm)	Surface Treatment
1800	100×150	55	3/4	Painted
1500	100×150	55	3/4	Painted
1200	100×150	55	3/4	Painted
900	100×150	55	3/4	Painted
750	100×150	55	3/4	Painted
600	100×150	55	3/4	Painted



FRAME SCAFFOLDING


- Material: Q195/Q235
- Surface Treatment: Pre-Gal. ;Powder Coated; Painted; HDG

Product Name	Description	Size
FRAME	Main Tube: 42*1.8/2.0/2.2mm Inner Tube:25*1.4/1.5mm	1219*1930mm
		1219*1700mm
		1219*1524mm
		914*1700mm
		762*1700mm

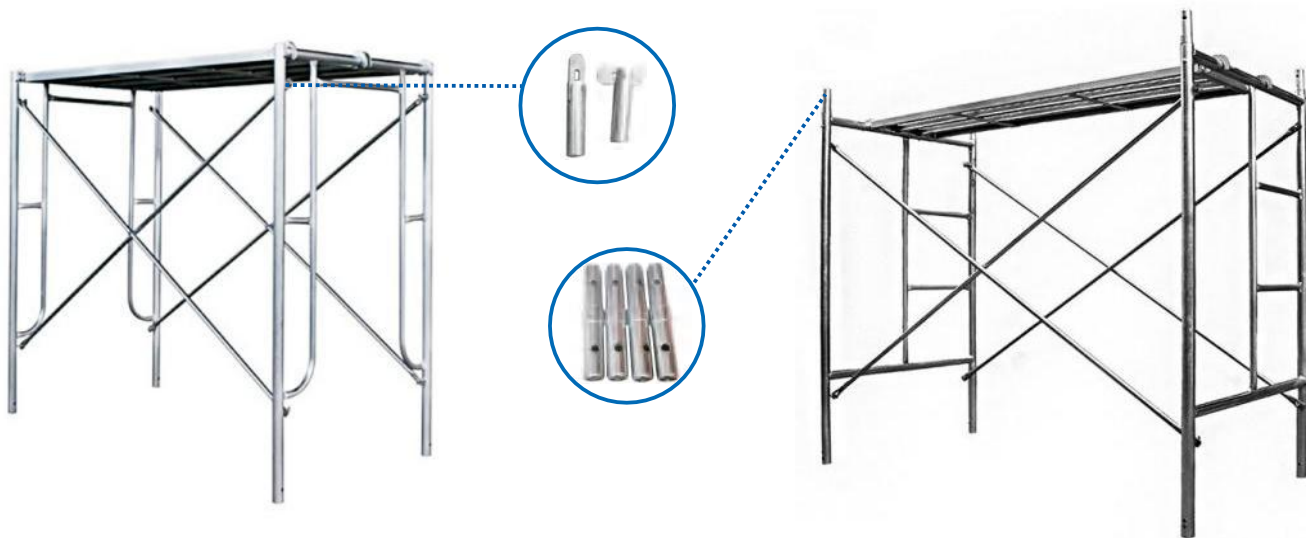

FRAME SCAFFOLDING


Product Name	Description	Size
Cross Brace	φ21.3X1.1/1.2/1.4mm	1829*1219*2198mm
		1829*914*2045mm
		1829*610*1928mm
		1219*1219*1724mm
		1219*610*1363mm

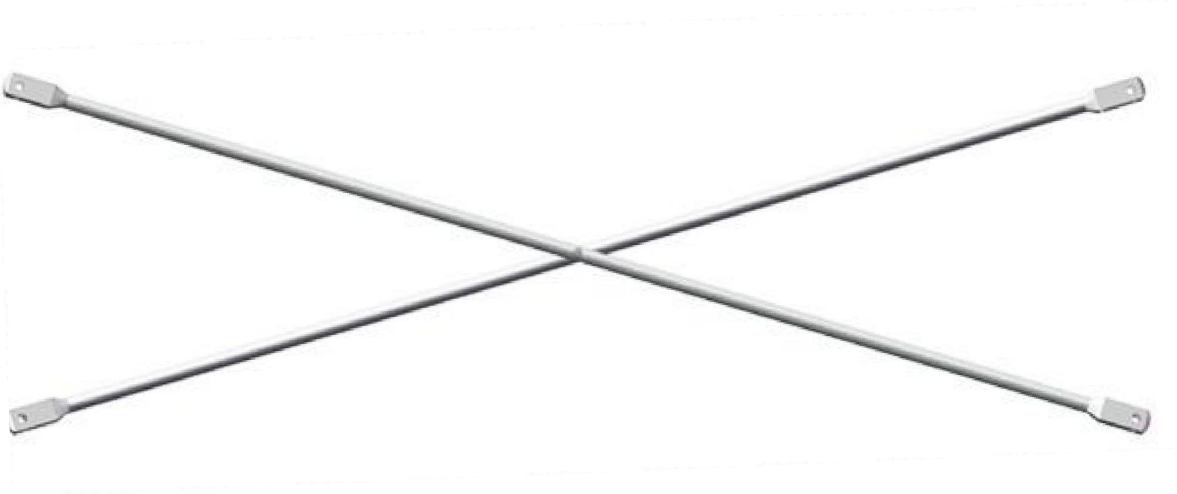

CUPLOCK SCAFFOLDING

- Material: Q235/Q345
- Surface Treatment: HDG; Powder Coated ;Painted


Item Name	OD&Thickness (mm)	Length (mm)
Cuplock Standard	48.3*3.2	250-3000
Cuplock Ledger	48.3*3.2	500-3000
Diagonal Brace	48.3*3.2	/

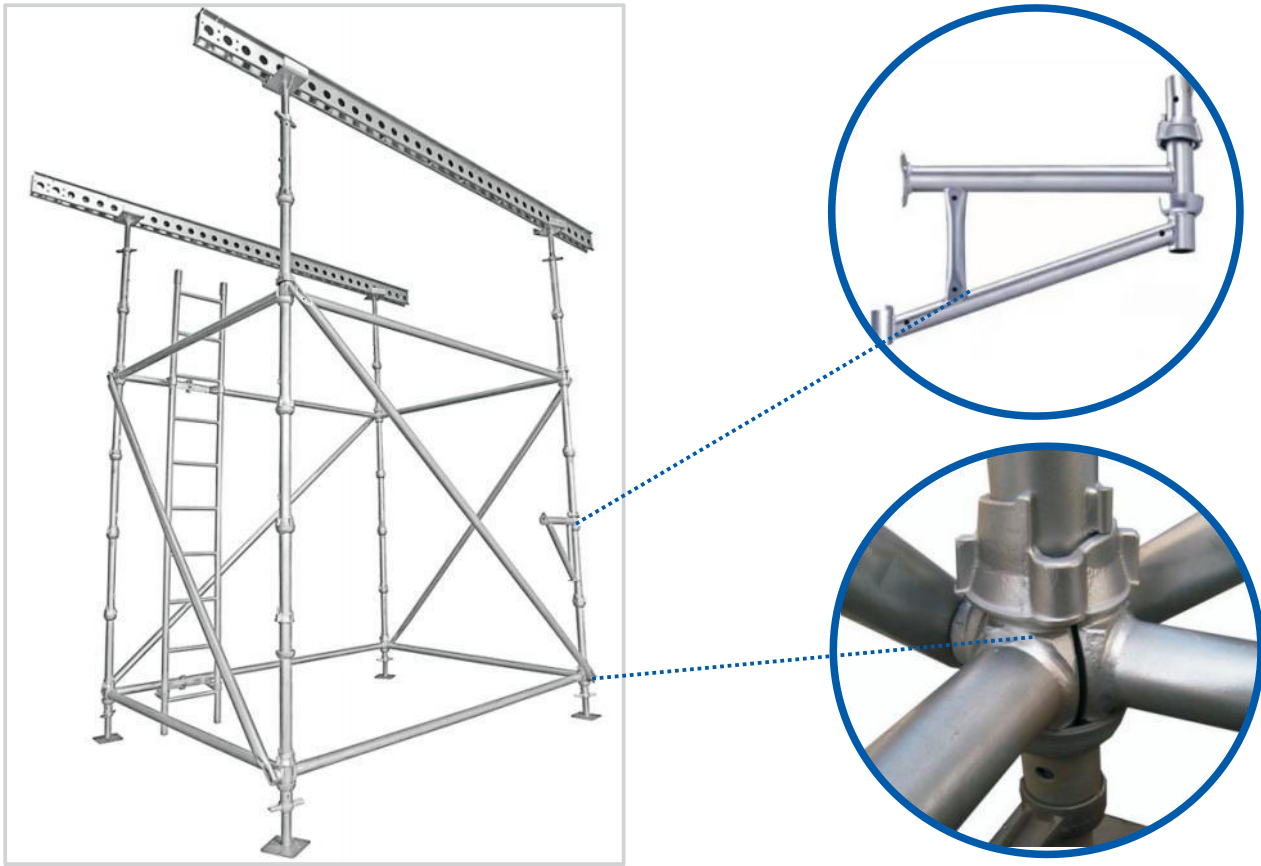

KWIKSTAGE SCAFFOLDING

- UK/Australia ; South East Asia ; Africa Kwikstage
- Material: Q235
- Surface Treatment: HDG; Powder Coated; Painted

Item Name	OD&Thickness (mm)	Length (mm)
Kwikstage Standard	48.3*4.0	250-3000
Kwikstage Ledger	48.3*3.2	500-3000
Kwikstage Ledger (Angle Iron)	50*50*5	500-3000
Diagonal Brace	48.3*3.2	/

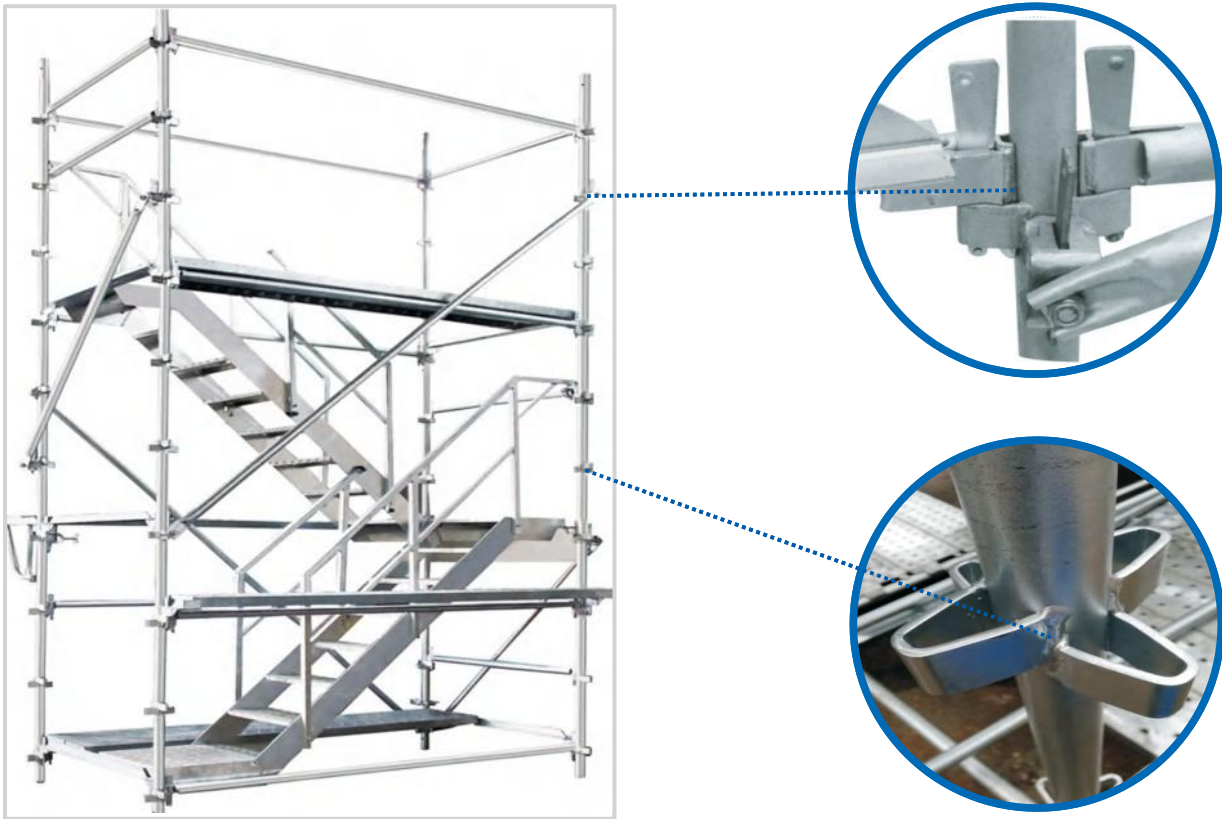

SCAFFOLDING TUBE

- Outer Diameter: 25.6mm,33.5mm, 42.5mm, 48.3mm, 59mm, 60.3mm.
- Thickness: 1.6mm-4.0mm;
- Grade: STK400/500,Q235/Q345
- Standard: BS1139, EN10219, EN39, EN74
- Surface Treatment: HDG, Pre Galvanised, Black, Painted, Anti-Rust Oil Coated, Threaded Engraved


Outer Diameter (mm)	Thickness (mm)	Length (m)
48.3mm-48.6mm	1.8-2.5mm	0.3m-12m
48.3mm-48.6mm	2.75mm	0.3m-12m
48.3mm-48.6mm	3.0mm	0.3m-12m
48.3mm-48.6mm	3.2mm	0.3m-12m
48.3mm-48.6mm	3.6mm	0.3m-12m
48.3mm-48.6mm	3.8mm	0.3m-12m
48.3mm-48.6mm	4.0mm	0.3m-12m
38mm	2mm-4mm	4.5m-7.5m
59mm	2mm-4mm	4.5m-7.5m
60.3mm	2.0mm-4.0mm	4.5m-7.5m



STAIR CASE

● Stair for Frame

Length (mm)	Height/Width (mm)
2283	1700*1524*420/480/500
2497	1700*1829*420/480/500
2459	1930*1524*420/480/500
2659	1930*1829*420/480/500

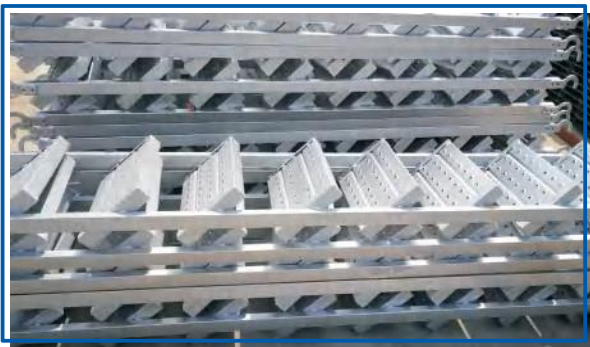


● Stair for Ringlock/Cuplock/Kwikstage

Length (mm)	Height/Width (mm)
2514	2000*1524*420/480/500
2710	2000*1829*420/480/500
2779	2000*1930*420/480/500
2972	2000*2198*420/480/500



● STAIR CASE HANDRAIL

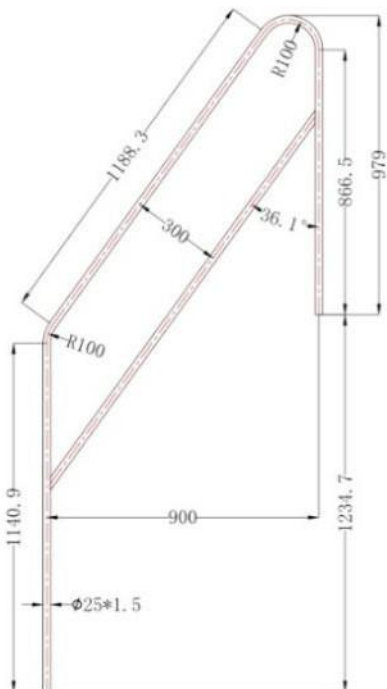

- Monkey Ladder
- Material : Q195, Q235

ITEM	SIZE(MM)
Monkey Ladder	300*3000
Monkey Ladder	350*3000



